

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/102704 A1

(51) International Patent Classification⁷:
B65H 5/00

B41J 2/01,

(74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden
Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo,
1506032 (JP).

(21) International Application Number:

PCT/JP2005/008267

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(22) International Filing Date: 22 April 2005 (22.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2004-131196

27 April 2004 (27.04.2004) JP

(71) Applicant (*for all designated States except US*): RICOH
COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome,
Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): KOGURE, Sei-
ichi [JP/JP]; 5-8-202, Saiwaicho, Atsugi-shi, Kanagawa,
2430012 (JP). IMOTO, Shinji [JP/JP]; 8-11-304, Kinuta
1-chome, Setagaya-ku, Tokyo, 1570073 (JP).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: IMAGE FORMING APPARATUS

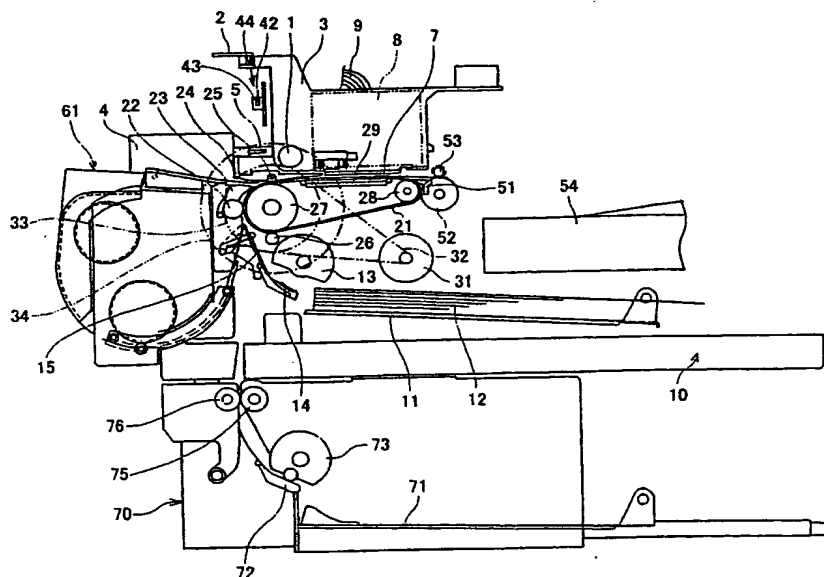

(57) Abstract: An image forming apparatus can form a high- quality image while acquiring a stable conveyance performance. A conveyance belt (21) conveys a recording medium (12) by attracting the recording medium (12) by an electrostatic force. A recording head (7) discharges liquid droplets toward the recording medium (12) being conveyed by the conveyance belt (21). Alternating positive and negative electric charges are applied onto the conveyance belt (21). A conveyance speed is controlled in accordance with a charge period length of the alternating positive and negative electric charges applied onto the conveyance belt (21).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.